



DUAL THREAD® HIGH/LOW BUGLE HEAD DRYWALL SCREW

Submittal Sheet # MWG03

DUAL THREAD®

PHILLIPS BUGLE HEAD, SHARP POINT, ALTERNATING HIGH/LOW THREAD DRYWALL SCREW

- Standard drywall screws for attaching gypsum board to 20-25 ga. commercial quality metal or wood studs
- Uses No. 2 Phillips bit
- Multiple applications, has varied uses
- Length 1-1/4" to 3"

Technical Data:

1) Material: AISI-1018 OR 1022	2) Recess: Type I No. 2
3) Threaded Length: <ul style="list-style-type: none"> a) Up to 2" Fully Threaded b) 2-14" to 3" is 50 mm c) Over 3-1/2" is 60-63m 	4) Tolerance of Length: <ul style="list-style-type: none"> ▪ +0.0/-1.5mm
5) Torque: #6 32KG-CM (MIN) #7 34KG-CM (MIN) #8 45KG-CM (MIN) #10 56KG-CM (MIN)	6) Mechanical Property: <ul style="list-style-type: none"> a) Case Depth : 0.1mm (MIN) b) Surface Hardness : HV 600-800 Core Hardness : HV 340-450

Installation Guidelines:


- A standard screwgun with a depth sensitive nose piece should be used to install Dual Thread screws with a RPM range of 0-2500 and torque adjustments.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
DT-114	6 x 1-1/4" Alternating Thread, Sharp Point	8,000	30
DT-158	6 x 1-5/8" Alternating Thread, Sharp Point	5,000	24
DT-200	6 x 2" Alternating Thread, Sharp Point	3,500	19
DT-214	6 x 2-1/4" Alternating Thread, Sharp Point	3,000	23
DT-212	8 x 2-1/2" Alternating Thread, Sharp Point	2,500	22
DT-300	8 x 3" Alternating Thread, Sharp Point	2,000	20



DUAL THREAD DRYWALL SCREW

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1002 AND/OR ASTM C-954

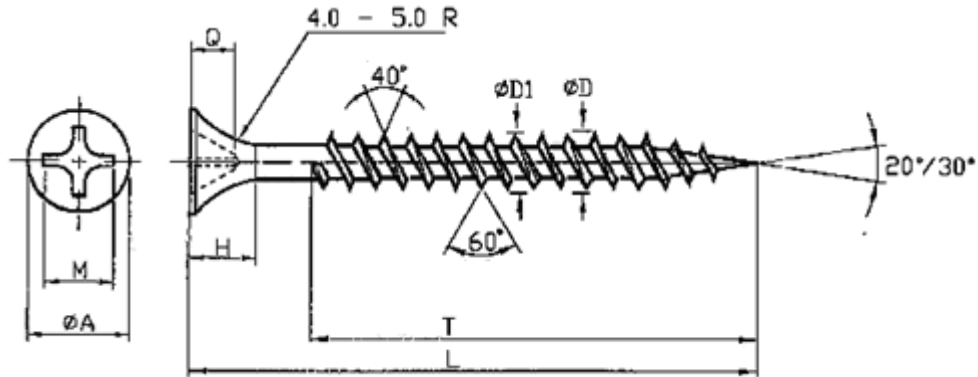

UNIT : MM

	A	D	D1	Q	M	H
#6 (M3.5) -17	8.00/8.30	3.60/3.90	3.00/3.15	2.67/3.10	4.50/5.10	4.50/5.50
#7 (M3.9) -16	8.00/8.30	3.90/4.20	3.10/3.30	2.67/3.10	4.50/5.10	4.50/5.50
#8 (M4.2) -15	8.00/8.30	4.20/4.60	3.35/3.50	2.67/3.10	4.50/5.10	4.50/5.50
#10 (M4.8) -16	8.40/9.00	4.90/5.10	4.05/4.25	2.67/3.10	4.50/5.10	4.50/5.50

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)