



FRAMERS® PAN HEAD FRAMER SHARP POINT DRYWALL SCREW

Submittal Sheet # MWG04



FRAMERS®
SHARP POINT, FINE THREAD PHILLIPS HEAD PAN HEAD FRAMER DRYWALL SCREW

- Attaches 20-25 ga. Commercial quality metal members.
- Length 7/16"

Technical Data:


1) Material: AISI-1018	2) Thread: TWINFAST THREAD TYPE SS
3) Torque: 34 KG-CM (MIN)	4) Salt Spray Test: 48 hours
5) Mechanical Property: a) Case Depth: 0.1mm (MIN) b) Surface Hardness: HV 600-800 c) Core Hardness: HV 340-450	6) Bending: 17°

Installation Guidelines:

- A standard screwgun with a depth sensitive nose piece should be used to install Pan Head Framers. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
FT-716S	7 x 7/16" Pan Head Sharp Point Fine Thread	15,000	37.4

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1002 AND/OR ASTM C-954

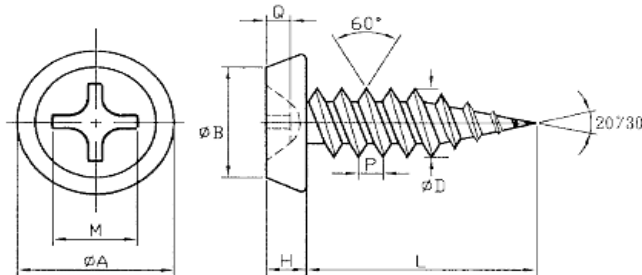

UNIT : MM

	A	M	A1	D	H	Q	L	P
M 3.8-23x11	7.50	4.35	5.70	3.62	2.50	2.20	10.60	1.00
# 7-23x7/16	8.00	5.00	6.70	3.90	2.90	2.70	11.50	1.20

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)