




LAMINATORS PHILLIPS BUGLE HEAD LAMINATING SCREW

Submittal Sheet # MWG05

LAMINATORS

PHILLIPS BUGLE HEAD, LAMINATING DRYWALL SCREW



- For temporary fastening of gypsum board to gypsum in laminated drywall construction
- Uses No. 2 Phillips bit
- Generally not heat treated
- Length 1 1/2"

Technical Data:


1) Material: AISI-1018	2) Thread: Coarse Thread
3) Wire Diameter: 3.8 + 0/-0.02	4) Thread Length: L + 0-.1.5
5) Salt spray test: 48 hours	

Installation Guidelines:

- A standard screwgun with a depth sensitive nose piece should be used to install Laminators. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
LT-112	10 x 1-1/2" Phillips Bugle Head, Coarse Thread	5,000	34.7

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1002 AND/OR ASTM C-954

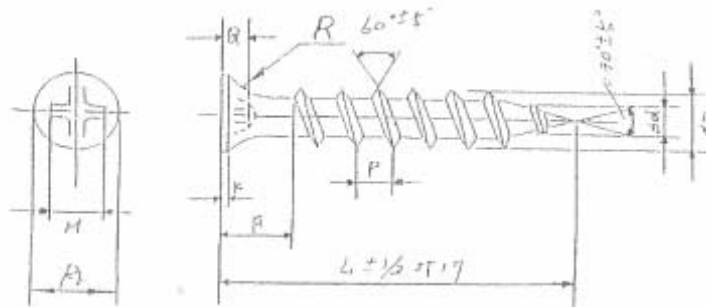

SPEC. SIZE	A	ØD	d	M	Q	F	K	R	P	WIRE
#10	8.00 8.30	5.00 5.35	3.20 3.40	4.5 5.1	2.67 3.10	4.5 6.0	0.50 0.80	4.50 5.00	2.80 3.20	3.8 + 0/-0.02

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)