




WAFER HEAD® DRYWALL SCREWS

Submittal Sheet # MWG06

WAFER HEAD



MODIFIED TRUSS-WAFER HEAD, PHILLIPS BUGLE HEAD, SHARP POINT, FINE THREAD K-LATH SCREW

- Attaches metal lath to 20-25ga. commercial quality metal studs.
- Substitutes as framing screw.
- Lengths 9/16" to 3"

Technical Data:


| | |
|--|---|
| 1) Material: AISI-1022 or 1018 | 2) Thread : Double Thread Lead Type SS Point |
| 3) Cross Recessed: Type I No. 2 Phillip | 4) Mechanical Property: <ul style="list-style-type: none"> a. CASE DEPTH : 0.1 mm (MIN) b. SURFACE HARDNESS : HV 600-800 c. CORE HARDNESS : HV 340-450 |
| 5) TORQUE : 45KG+CM (MIN) | 6) BENDING : 17° |
| 7) TOLERANCE OF LENGTH : BELOW/ON 1" +0.76mm/m OVER 1" +1.27 M/M | 8) Salt spray test: <ul style="list-style-type: none"> • Black phosphate: 48 hours • Yellow Zinc: 48 hours • Dacrotized: 500 hour |

Installation Guidelines:

- A standard screwgun with a depth sensitive nose piece should be used to install Wafer Head Screw. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.

| Part Number | Product Description | Box Qty. | Approx. Wt. Ctn |
|-------------|---|----------|-----------------|
| WT-916 | 8 x 9/16" Wafer Head Sharp Point Fine Thread | 10,000 | 40 |
| WT-100 | 8 x 1" Wafer Head Sharp Point Fine Thread | 5,000 | 29 |
| WT-114 | 8 x 1-1/4" Wafer Head Sharp Point Fine Thread | 5,000 | 33 |
| WT-158 | 8 x 1-5/8" Wafer Head Sharp Point Fine Thread | 5,000 | 39 |
| WT-200 | 8 x 2" Wafer Head Sharp Point Fine Thread | 3,500 | 32 |
| WT-212 | 8 x 2-1/2" Wafer Head Sharp Point Fine Thread | 2,500 | 28 |
| WT-300 | 8 x 3" Wafer Head Sharp Point Fine Thread | 2,000 | 25 |

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1002 AND/OR ASTM C-954

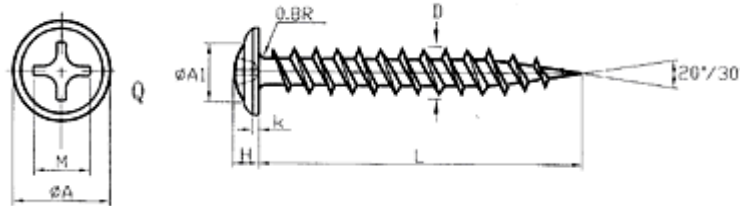

UNIT: MM

| | A | M | D | H | k | Q | A1 | THREAD PER-INCH | THREAD DIA. | THREAD O.D. |
|-------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|-----------------|-------------|-------------|
| #8 – 15 (M4.2) | 10.80 11.30 | 4.20 4.50 | 4.04 4.22 | 1.90 2.30 | 1.00 1.40 | 1.80 2.50 | 6.90 7.20 | 15 | 2.70~2.90 | 4.00~4.30 |

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

3

Submittal Approvals: (Stamps or Signatures)