




TRIM HEAD DRILLERS® SELF DRILLING SQUARE DRIVE DRYWALL SCREW

Submittal Sheet # MWG14



TRIM HEAD DRILLERS®

SELF DRILLING SQUARE DRIVE DRYWALL SCREW

- Attaches base trim over single or double layer of gypsum board to 14-20 ga. metal stud or track.
- Uses No. 1 square drive bit
- Length 1-5/8", 2-1/4", 3"


1) Material: AISI-1018 OR 1022	2) Thread: Double Lead Thread Drill Point
3) Mechanical Property: a) Case Depth : 0.1mm (MIN) b) Surface Hardness : HV 550-800 c) Core Hardness : HV 270-450 d) Torque: #6 28KGS-CM (MIN) #7 35KGS-CM (MIN) #8 45KGS-CM (MIN)	4) Cross Recess : No. 1 Square Drive

Installation Guidelines:

- A standard screw gun with a depth sensitive nose piece should be used to install Trim Head screws. For optimal fastener performance, the screw gun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screw gun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional failure of the fastener or *stripout* of the substrate.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
TP-158	6 x 1-5/8" Trim Head, Square Drive Self Driller	6,000	19.9
TP-214	6 x 2-1/4" Trim Head, Square Drive Self Driller	4,000	24.9
TP-300	8 x 3" Trim Head, Square Drive Self Driller	2,000	24.8

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1002 AND/OR ASTM C-954

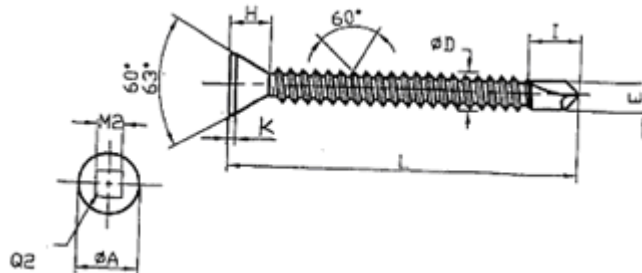

UNIT : MM

SIZES	M2	Q2	K	ØD	E	I	H	TPI
# 6 – 20	2.29	1.20	0.6	3.40	2.75	3.59	3.40	18
	2.32	1.60	0.8	3.60	2.85	min	3.80	
# 7 – 19	2.29	1.20	0.6	3.74	3.10	4.10	3.01	18
	2.32	1.60	0.8	3.90	3.25	Min	3.18	
# 8 – 18	2.29	1.20	0.6	4.10	4.10	3.97	3.40	18
	2.32	1.60	0.8	4.30	4.30	min	3.80	

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)