




DUAL THREAD EZ-DEC® SCREWS

Submittal Sheet # MWG18



DUAL THREAD EZ-DEC®

BUGLE HEAD, PHILLIPS DRIVE, ALTERNATING HIGH/LOW THREAD, DECK FASTENERS

- Exterior wood screw for outdoor application including decks, treated wood, patios, fencing, etc.
- Alternating High/Low Threads
- Corrosion resistant coating. "Long-Life" 500 hrs. SST

Technical Data:

1) Material: AISI-1018-1022	2) Mechanical Property: <ul style="list-style-type: none"> a. Case Depth : 0.1MM (min) b. Core Hardness: HV340/450 c. Surface Hardness: HV500/750
3) Thread length: <ul style="list-style-type: none"> a. Less than or equal to 2" FULL THREAD LENGTH b. 2-1/4 less than or equal to 3" (55mm-75mm) Thread Length 49-51mm c. Greater then or equal to 3-1/2 Thread Length 60-63mm 	4) Bending : 17°
5) Coating: <ul style="list-style-type: none"> a. DACROMET or "Long -Life" 500hrs SST 	

Installation Guidelines:


- A standard screwgun with a depth sensitive nose piece should be used to install EZ-DEC screws. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
DTR-114	6 x 1-1/4" Alternating Thread, Sharp Point Wood Deck Screw	8,000	30
DTR-158	6 x 1-5/8" Alternating Thread, Sharp Point Wood Deck Screw	5,000	23
DTR-200	6 x 2" Alternating Thread, Sharp Point Wood Deck Screw	3,500	21
DTR-212	6 x 2-1/2" Alternating Thread, Sharp Point Wood Deck Screw	2,500	22
DTR-300	8 x 3" Alternating Thread, Sharp Point Wood Deck Screw	2,000	23
DTR-312	10 x 3-1/2" Alternating Thread, Sharp Point Wood Deck Screw	1,000	18
DTR-400	10 x 4" Alternating Thread, Sharp Point Wood Deck Screw	1,000	19



BUGLE HEAD DUAL THREAD WOOD DECK SCREW

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1002 AND/OR ASTM C-954

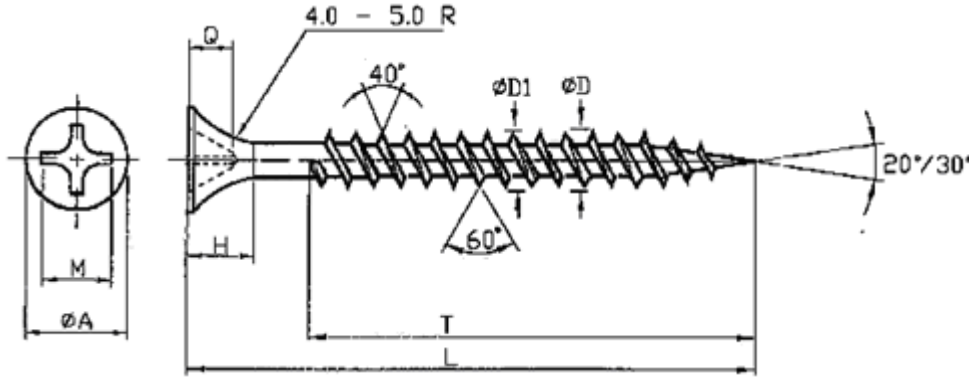

Unit MM

	A	D	D1	Q	M	H
#6 (M3.5) -17	8.00/8.30	3.60/3.90	3.00/3.15	2.67/3.10	4.50/5.10	4.50/5.50
#7 (M3.9) -16	8.00/8.30	3.90/4.20	3.10/3.30	2.67/3.10	4.50/5.10	4.50/5.50
#8 (M4.2) -15	8.00/8.30	4.20/4.60	3.35/3.50	2.67/3.10	4.50/5.10	4.50/5.50
#10 (M4.8) -16	8.40/9.00	4.90/5.10	4.05/4.25	2.67/3.10	4.50/5.10	4.50/5.50

SALT SPRAY TEST REPORT

TEST NO. S08A00653-1	MATERIAL
DATE: 98.03.03	TYPE
DURATION DACROMET, 500H	PART #3339419 M4.0X27 2F(T15)2A

一、OBSERVATION :

1. SODIUM CHLORIDE : 5±1% 500
2. PH VALUE : 6.5 - 7.2 6.85
3. PRESSURE : 0.7~1.7 kg/cm² 1.0
4. GHAMBER TEMP : 33.3 -36.1 35.0

三、RESULT

(THE SCREWS ARE TESTED FROM AM8:00 ON MAR. 06, 2009 TO AM8:00 ON MAR. 27, 2009. TOTAL TESTING HOURS ARE 500HOURS. AFTER TESTING 500HOURS, THE SCREWS HAVE NO RED RUST AND THEY PASS THE TEST.)

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)