




**ALL★AMERICAN TOPPERS**

**Phillips Bugle Head Coarse Thread Screws**

Submittal Sheet # MWG02-AA



**All-American Toppers (HIGH-TOPPERS®)**

PHILLIPS BUGLE HEAD, COARSE THREAD DRYWALL SCREW


- Standard drywall screws for attaching gypsum board to wood studs.
- Maintains superior holding power and ease of penetration.
- Uses No. 2 Phillips bit.
- Point designed for fast penetration.

**Installation Guidelines:**

- A standard screwgun with a depth sensitive nose piece should be used to install High-Toppers. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
HT-114	6 x 1-1/4" Sharp Point Coarse Thread	8,000	31
HT-158	6 x 1-5/8" Sharp Point Coarse Thread	5,000	24
HT-200	6 x 2" Sharp Point Coarse Thread	3,500	24

**ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1513 – 04, C-1002 AND/OR ASTM C-954**

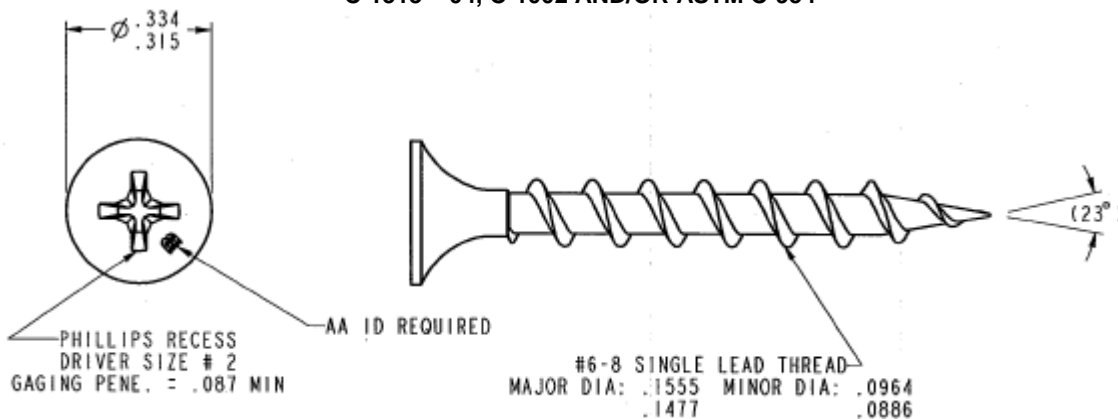

**MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.**

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_ Date \_\_\_\_\_

Submittal Approvals: (Stamps or Signatures)

