




ALL★AMERICAN TOPPERS

Phillips Bugle Head Self Drilling Screws

Submittal Sheet # MWG05-AA



All-American Toppers (Z-DRILLERS®)

PHILLIPS BUGLE HEAD, SELF-DRILLING ZINC PLATED DRYWALL SCREW


- Attaches gypsum board, insulated board and other low density material to 14-20 ga. metal.
- Maintains a commercial zinc coating offering low corrosion protection **NO CORROSION WARRANTY.**
- Uses No. 2 Phillips bit.
- Lengths 1-1/8" to 3"

Installation Guidelines:

- A standard screwgun with a depth sensitive nose piece should be used to install Drillers. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced.*
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread.**

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
AA-ZP114	6 x 1-1/4" Bugle Head Self Drill Zinc	8,000	35
AA-ZP158	6 x 1-5/8" Bugle Head Self Drill Zinc	5,000	27
AA-ZP200	6 x 2" Bugle Head Self Drill Zinc	3,500	27

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1513 – 04, C-1002 AND/OR ASTM C-954

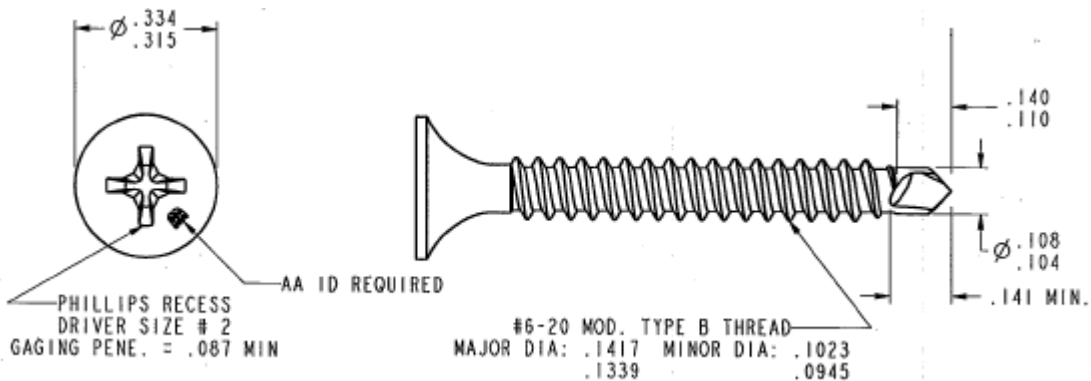

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)