




ALL★AMERICAN TOPPERS
Self Drilling – Phillips Pan Head

Submittal Sheet # MWG06-AA



All-American Toppers (FRAMING DRILLER®)
SELF DRILLING, PHILLIPS PAN HEAD FRAMER DRYWALL SCREW


- Attaches 14-20 ga. metal members
- Attach fixtures, back-up plates, electrical boxes, etc. to 14 ga. metal members
- Uses No. 2 phillips bit
- Length 7/16"

Installation Guidelines:

- A standard screwgun with a depth sensitive nose piece should be used to install Pan Head Framers. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.

Part Number	Product Description	Box Qty.	Approx. Wt. Ctn
AA-ZP716	7 x 7/16" Pan Head Self Drilling	15,000	38

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1513 – 04, C-1002 AND/OR ASTM C-954

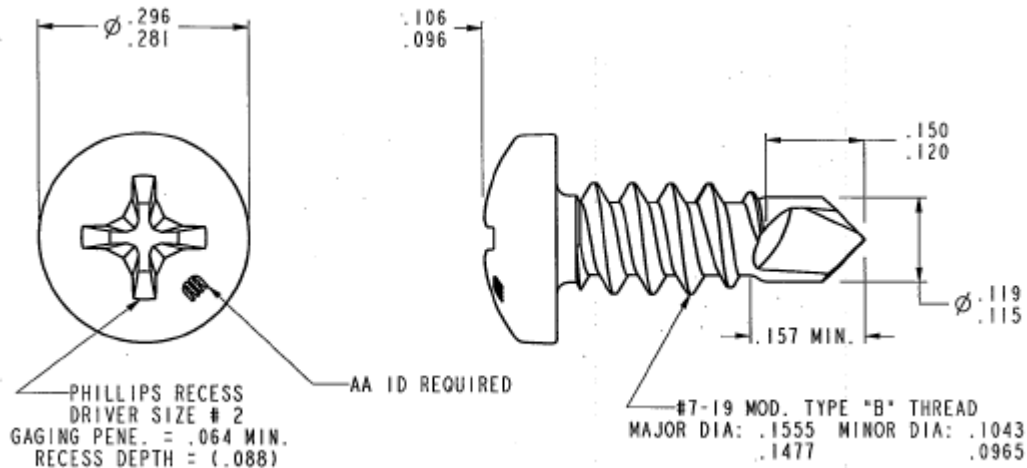

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)