



ALL★AMERICAN TOPPERS
Pan Head Framer Sharp Point Drywall Screw

Submittal Sheet # MWG04-AA



All-American Toppers (FRAMERS®)

SHARP POINT, FINE THREAD PHILLIPS HEAD PAN HEAD FRAMER DRYWALL SCREW


- Attaches 20-25 ga. Commercial quality metal members.
- Length 7/16"

Installation Guidelines:

- A standard screwgun with a depth sensitive nose piece should be used to install Pan Head Framers. For optimal fastener performance, the screwgun should be a minimum of 4 amps and have a RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips *should be replaced*.
- The fastener is fully seated when the *head is flush* with the work surface.
- *Overdriving* may result in torsional *failure* of the fastener or *stripout* of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of **3 pitches of thread**.
-

| Part Number | Product Description | Box Qty. | Approx. Wt. Ctn |
|-------------|--|----------|-----------------|
| AA-FT716 | 7 x 7/16" Pan Head Sharp Point Fine Thread | 15,000 | 43 |

ALL MEYER WHOLESALE GROUP FASTENERS ARE MANUFACTURED TO CONFORM TO STANDARDS SET BY ASTM C-1513 – 04, C-1002 AND/OR ASTM C-954

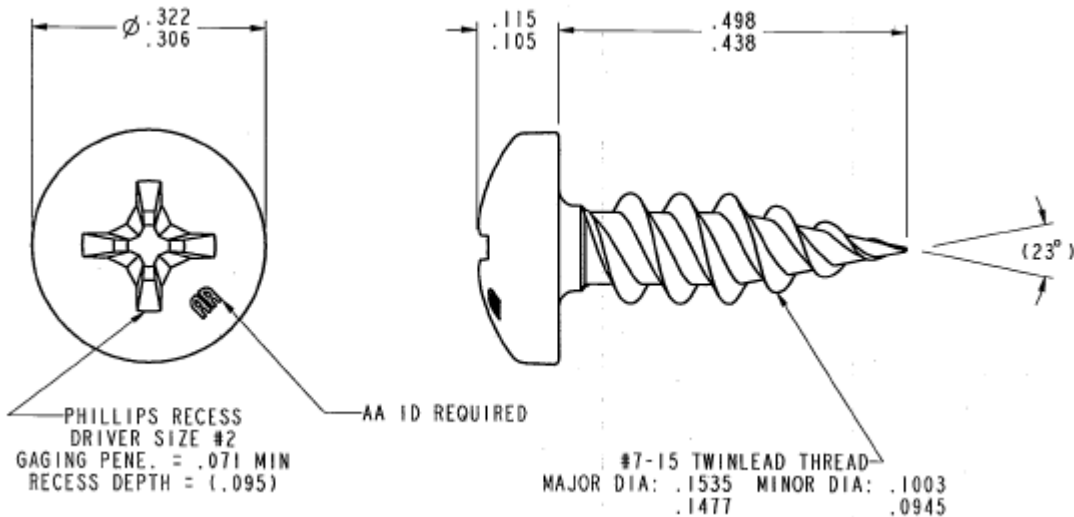

MEYER WHOLESALE GROUP, INC. FASTENERS ARE MANUFACTURED IN AN ISO 9002 AND ISO 14001 CERTIFIED AND APPROVED FACTORY.

Job Name _____

Contractor _____ Date _____

Submittal Approvals: (Stamps or Signatures)